


POINT LOAD IN THE MIDDLE OF SPAN

Technical data for channel profiles MT (max. span width/deflection - point Load in the middle of span)

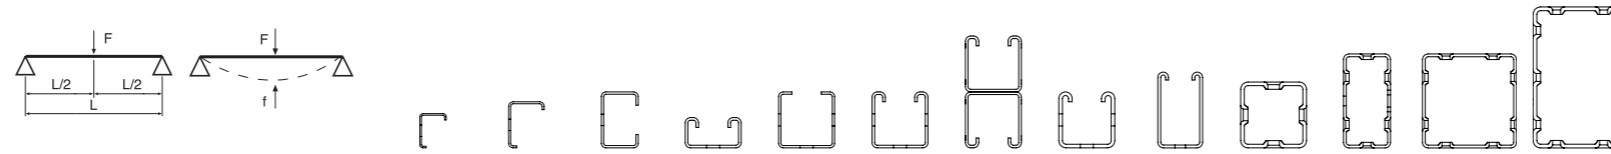

Max. span width L [cm] / deflection f [mm] - Result

load F [kN]	MT-10		MT-15/ MT-15 OC		MT-20/ MT-20 OC		MT-30/ MT-30 OC		MT-40 T/ MT-40 T OC		MT-40/ MT-40 OC		MT-40D/ MT-40D OC		MT-50/ MT-50 OC		MT-60/ MT-60 OC		MT-70 OC		MT-80 OC		MT-90 OC		MT-100 OC	
	L	f	L	f	L	f	L	f	L	f	L	f	L	f	L	f	L	f	L	f	L	f	L	f	L	f
0,25	83	0.4	157	7.8	260	12.9	152	7.6	294	14.7	317	15.8	600	29.4	339	16.9	600	29.9	469	23.4	600	11.6	600	8.3	600	3.6
0,50	42	0.1	93	3.2	188	9.3	109	5.5	215	10.7	234	11.7	489	24.4	254	12.6	482	24.1	368	18.4	600	17.7	600	11.9	600	4.7
0,75	28	0.0	62	1.4	155	7.7	90	4.5	178	8.9	194	9.6	418	20.9	212	10.6	411	20.5	311	15.5	600	23.8	600	15.4	600	5.8
1,00	21	0.0	47	0.8	134	6.6	75	3.5	154	7.6	169	8.4	371	18.5	185	9.3	363	18.1	274	13.6	600	29.9	600	19.0	600	6.9
1,25	17	0.0	37	0.5	113	5.0	60	2.3	134	6.2	151	7.6	336	16.8	167	8.3	329	16.4	247	12.3	551	27.5	600	22.5	600	8.0
1,50	14	0.0	31	0.4	94	3.4	50	1.6	112	4.3	138	6.9	309	15.4	152	7.6	302	15.0	227	11.3	512	25.6	600	26.1	600	9.1
1,75	12	0.0	27	0.3	81	2.5	43	1.2	96	3.2	122	5.5	287	14.4	141	7.0	281	14.0	211	10.5	479	23.9	600	29.6	600	10.2
2,00	10	0.0	23	0.2	71	1.9	38	0.9	84	2.4	107	4.2	270	13.5	132	6.5	264	13.2	198	9.9	452	22.6	572	28.6	600	11.3
2,25	9	0.0	21	0.2	63	1.5	34	0.7	75	1.9	95	3.3	248	11.6	117	5.1	249	12.4	187	9.3	429	21.4	545	27.2	600	12.4
2,50	8	0.0	19	0.1	57	1.2	30	0.6	67	1.6	86	2.7	224	9.5	106	4.2	237	11.8	177	8.8	409	20.4	522	26.0	600	13.5
2,75	8	0.0	17	0.1	52	1.0	27	0.5	61	1.3	78	2.2	204	7.9	96	3.5	227	11.3	169	8.4	391	19.5	501	25.0	600	14.6
3,00	7	0.0	16	0.1	47	0.9	25	0.4	56	1.1	71	1.9	188	6.7	88	2.9	208	9.6	162	8.1	376	18.8	482	24.1	600	15.7
3,50	6	0.0	13	0.1	41	0.6	22	0.3	48	0.8	61	1.4	161	4.9	76	2.1	179	7.1	150	7.5	349	17.4	450	22.5	600	17.9
4,00	5	0.0	12	0.1	36	0.5	19	0.2	42	0.6	54	1.1	141	3.8	66	1.6	157	5.4	141	7.0	328	16.3	424	21.2	600	20.1
4,50	5	0.0	10	0.0	32	0.4	17	0.2	37	0.5	48	0.8	126	3.0	59	1.3	140	4.3	128	5.9	310	15.5	401	20.0	600	22.3
5,00	4	0.0	9	0.0	28	0.3	15	0.1	34	0.4	43	0.7	113	2.4	53	1.1	126	3.5	115	4.8	295	14.7	382	19.0	600	24.5
6,00	3	0.0	8	0.0	24	0.2	13	0.1	28	0.3	36	0.5	95	1.7	44	0.7	105	2.4	96	3.3	270	13.5	350	17.5	600	28.9
7,00	3	0.0	7	0.0	20	0.2	11	0.1	24	0.2	31	0.3	81	1.2	38	0.5	90	1.8	82	2.4	232	10.0	325	16.2	571	28.5
8,00	3	0.0	6	0.0	18	0.1	9	0.1	21	0.2	27	0.3	71	1.0	33	0.4	79	1.4	72	1.9	204	7.7	305	15.2	537	26.8

Design resistance

Selection example:

- 1,0 kN (= 100 kg) should be carried by a channel with a channel span width L = 100cm (single span simply supported).

Solution:

- Select the line with the load, F = 1,0 kN.
- The channels MT-20, MT-40 T up to MT-100 can be used because the permissible span width (table value) is larger or equal to the required span width of L = 100cm.

Load tables are based on stress and deflection calculations, lateral torsional buckling is not considered.